


HIGH END SERIES

SIGNATURE ST250

Loudspeaker cable

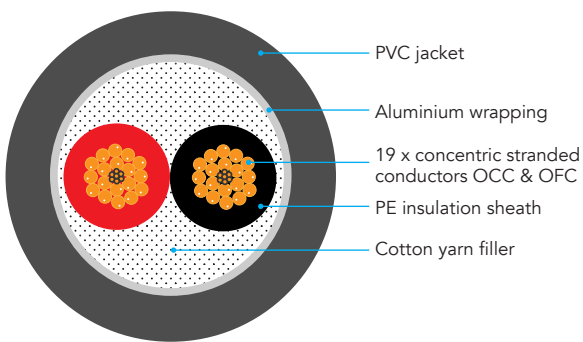

DESCRIPTION

Pure copper OCC-6N & OFC-4N (2.5 mm²) in a STAR structure composed of 19 concentric conductors, offering perfect structural stability, optimizing transfer and velocity over all audio frequencies, including very high frequencies, for total respect of higher harmonics.

Triple shielding for perfect insulation from surrounding radiation: polyethylene (PE) sheathing, cotton yarn filler (mitigating inner micro-vibrations) and aluminum mylar foil contributing to a realistic and airy soundstage with perfect separation of musicians.

Easy metric marking for custom cutting.

SPECIFICATIONS



Loudspeaker



Amplifier

Resistance: 0.006704 Ω/m

Inductance: 0.9944 μH/m

Capacitance: 93.088 pF/m

SPOOL

100 m SKU : NORPR250100
EAN : 3700795185261

FINISH

Anthracite grey - Smooth texture

Metric marking

Size: Ø10 mm

Spool: 100 m

CONDITIONING

Quantity / box: 1 spool

Type: Box

Dimensions (W x H x D) : TBC

Weight : TBC